


Mini Size 180 Degree keystone shielded , jack, Cat 6A Tooless

Presentation



Photo

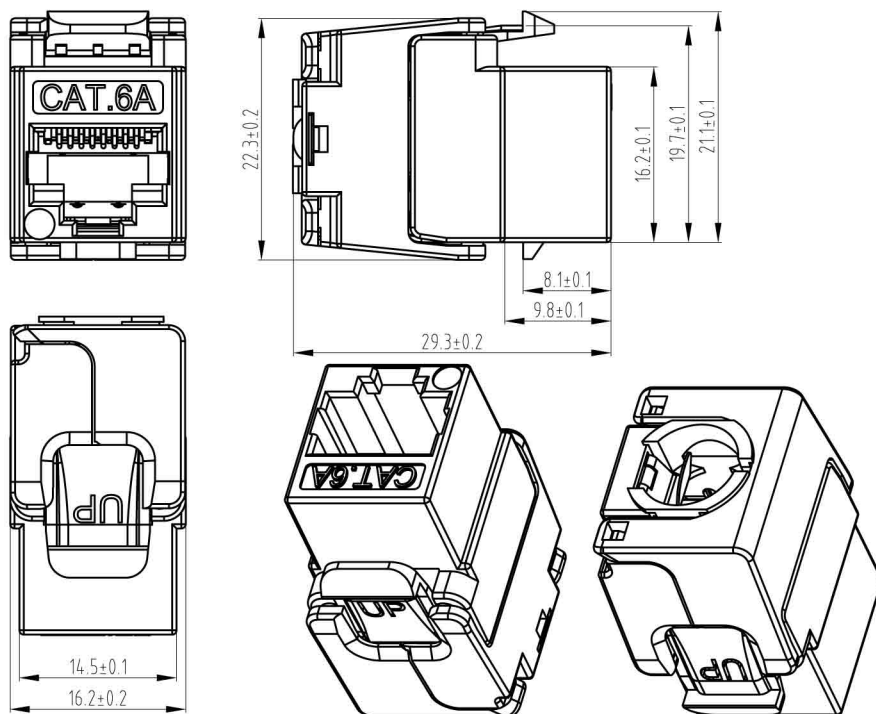

PoE++ Type 4

GHMT sertifikat R6378a-20 IEEE802.3by (Type 4) Max Power 100W

Gives 25 years sytem warranty when using the follwoing cable types: 77780500 | 77790500 | 77782500

System warranty for PoE demands a separat certification test of the PoE Links.

Sertified by third Party (3P)

Electrical

Current Rating:	1.5 Amps
Insulation Resistance:	≥ 500 MΩ
Contact Resistance:	≤ 10 mΩ
DC Resistance:	≤ 0.1 Ω
DC/AC Volt Endurance:	DC1000V/AC750V 1min

Mechanical

Plug Insertion Life ≥ 750 Cycles WITH FCC COMPLIANT RJ-45 PLUG
Plug & Jack Contact Force ≥ 100 Grams WITH FCC COMPLIANT RJ-45 PLUG
Plug Retention Force: ≥ 11 lbf
DURABILITY : 200 TERMINATION CYCLES
OPERATING TEMPERATURE : -10~60°C
OPERATING HUMIDITY : 10%~90%RH
STORAGE TEMPERATURE : -40°C TO 68°C

Physicals

Housing: Zinc Die-Casting with high quality Nickel plating
Plastic Parts: High impact flame retardant plastic,
UL 94V-0 rated

PCB: FR-4, 1.2mm Thickness

Jack Wire: 0.35 mm Phosphor bronze gold over nickel plating

IDC CONDUCTOR: 0.5mm Phosphor bronze, tin-plating

CONTACT COMPATIBILITY :

ACCOMMODATES 26 TO 23AWG SOLID

Standards Verification

ANSI/TIA-568-C.2 ;

ISO/IEC 11801 :2002/Amd.2:2010 ;

YD/T 926.3-2009 ;

ISO/IEC 60603-7 COMPLIANT ;

RoHS directive 2002/95/EC compliant