


# Surface Mount Wall Box

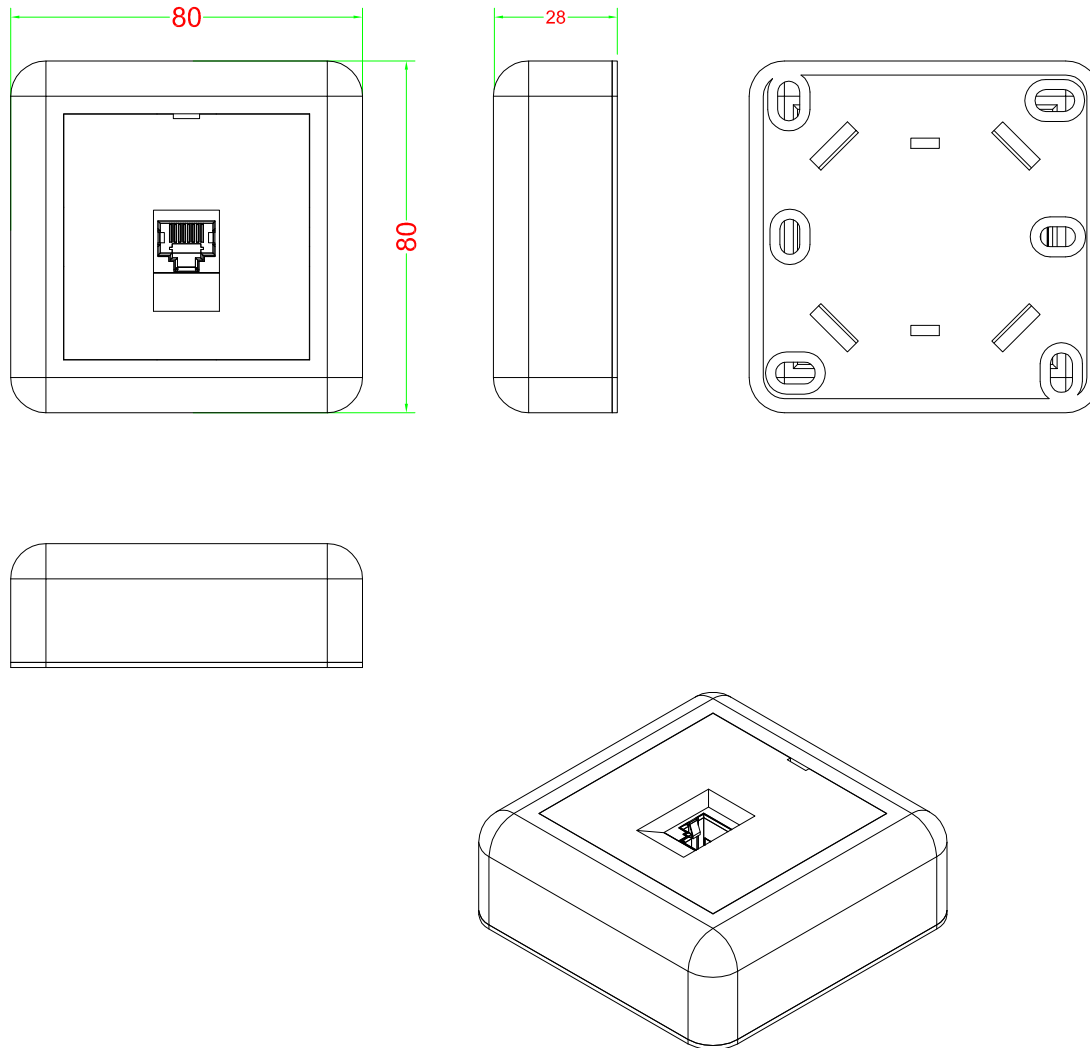

## Performance:

Meets C6A EIA/TIA 568C Standard.

## Materials:

Body : Fireproof ABS UL-94V0  
Jack : 8P8C 50 micro inches gold plated  
PCB : FR-4 / UL-94V0  
IDC Body : Fireproof ABS UL-94V0  
IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.  
For 110 or Krone punch-down Tool


## Electrical Specifications:

Insulation Resistance : 500M ohms (min.)  
Contact Resistance : 20m ohms (max.)  
Current Rating : 1.5 Amps .  
DC Resistance : 0.1 ohms (max.)  
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

## Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)  
Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

DRAW NO:			ITEM NO:	31002001
	APPR		CUSTOMER:	
UNIT: m/m	DESIGN	dGroup as	DATE:	
SCALE:	Ref. NO:		TOLERANCE:	X ± 1    · X ± 0.2    · XX ± 0.15



**dGLink Systems**  
Networking made Easy