

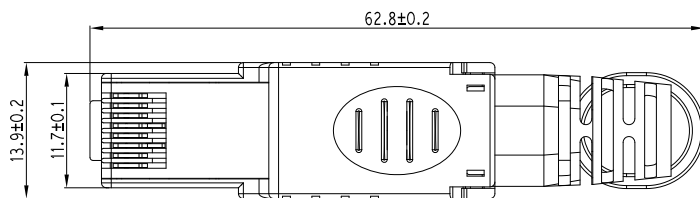


Presentation

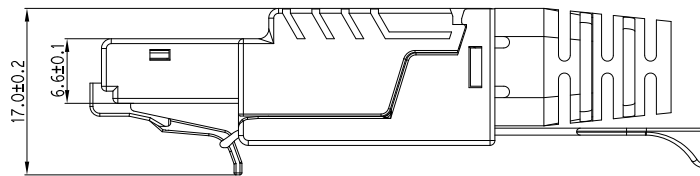

Photo

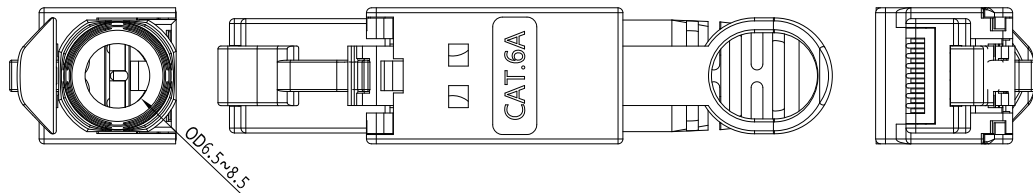

Electrical

Current Rating:	1.5 Amps
Insulation Resistance:	≥ 500 MΩ
Contact Resistance:	≤ 20 mΩ
DC Resistance:	≤ 0.3 Ω
DC/AC Volt Endurance:	DC1000V/AC750V 1min

Mechanical

Mating cycles :	750 cycles minimum
IDC mating cycles :	200 cycles minimum
Operating temperature :	-10~60°C
Operating humidity :	10%~90%RH
Storage temperature :	-40°C TO 68°C

Physicals

Housing: Zinc Die-Casting with high quality Nickel plating
 Plastic Parts: High quality engineering plastic
 PCB: FR-4, 1.6mm Thickness
 Jack Wire: 0.35 mm Phosphor bronze gold over nickel plating
 IDC conductor : 0.35mm Phosphor bronze, tin-plating
 Contact compatibility :accommodate 23 to 26 AWG solid

Standards Verification

ANSI/TIA-568.2-D-2018;
 ISO/IEC TR 11801-9901 Ed.1.0 (2014-10) ;
 ISO/IEC 60603-7-51
 YD/T 926.3-2009