



LTC ADSS-150

24x SM G.657.A1 (2x12)

Article number: 77672

Date: 12-05-2020



Product characteristics

Cable type	ADSS
Fibre type	Single mode 9/125
Optical fibre standard	ITU-T G.657.A1
Number of fibers	24
Number of fibers per optical element	12
Number of cores	2
Optical element	Loose tube, gel filled
Cable metal free	Yes
Number of layers	1 Layer
Strip method	1 Rip cord
Strain relief	Yes
Type of strain relief	Aramid fibre
Material outer sheath	HDPE
Colour outer sheath	Black
Outer sheath thickness	1,2 mm
Outer diameter approx.	12,2 mm
Marking	ACE - TKF LTC ADSS 24x SM G.657.A1 (2x12) A-DQ(ZN)2Y 77672 {Batch} {Year} {Length}



Application

Standardization	EN IEC 60794-3-20
Test procedures	EN IEC 60794-1-2
Application	Outside
Euro fire class according to EN 13501-6	Fca

Mechanical specification

Tensile load short term (Tm)	9700 N
Cable strain by Tm	0,8 %
Max. fiber strain at Tm	0,09 %
Tensile load Long Term (TI)	8600 N
Max. operational tension (MOT)	8600 N
Max. allowable tension (MAT)	12700 N
Min. bending radius during installation	245 mm
Min. bending radius after installation	185 mm
Crush resistance acc. meth.E3A	1500 N/dm
Impact strength	5 J
Torsion resistance	360 °/m

Optical specification

Category according to EN 50173	OS2
Max. attenuation @ 1310 nm	0,38 dB/km
Max. attenuation @ 1550 nm	0,24 dB/km
Max. attenuation @ 1625 nm	0,26 dB/km

Environmental specification

Longitudinal water blocking cable	Yes
Longitudinal watertight construction	Super Absorbing Polymer
Installation temperature	-15/55 °C
Transportation and storage temperature	-40/70 °C



Operational temperature range Ta1 - Tb1	-40/70 °C
Max. attenuation increase during Ta1 - Tb1	0,05 dB
Operational temperature range Ta2 - Tb2	-40/70 °C
Max. attenuation increase during Ta2 - Tb2	0,15 dB
UV resistant	Yes

Other specification

Halogen free (acc. EN 60754-1/2)	Yes
Effective E-modulus	10,3 GPa
Effective CTE	8,6 10 ⁻⁶ /°C
Cross sectional area	117 mm ²

Logistical specifications

Unit	meter
Weight (kg)	0.110



Fibre specification G.657.A1

ACE-DS-OT-VSP-SM-G657A1-v02-e

date : 04-12-2019

Technical product information

Product characteristics - optical fibers

Fibre

Type of fibre	Hydrogen passivated, dispersion unshifted, matched cladding bending loss insensitive single mode fibre 9/125 μm Full compatible with G.652.D fibre Optical and geometrical properties exceed ITU-recommendations G.652.D and G.657.A1
Standard	IEC-60793-2-50, B-657.A1
Standard	ITU-T G.657.A1

Characteristics

Parameter	Properties	Unit
Mode field diameter: 1310 nm	9.0 ± 0.3	μm
Mode field diameter: 1550 nm	10.2 ± 0.4	μm
Core non-circularity	max. 6	%
Core/cladding concentricity error	max. 0.4	μm
Cladding diameter	125.0 ± 0.5	μm
Cladding non-circularity	max. 0.7	%
Coating diameter	242 ± 5	μm
Coating/cladding concentricity error	max. 8	μm
Temperature sensitivity: -60 to +85 °C	max. 0.05	dB/km
Bending sensitivity - 100 turns around $\varnothing 50$ mm - 1550 nm	max. 0.05	dB
Bending sensitivity - 100 turns around $\varnothing 60$ mm - 1625 nm	max. 0.05	dB
Bending sensitivity - 10 turns around $\varnothing 30$ mm - 1550 nm	max. 0.1	dB
Bending sensitivity - 10 turns around $\varnothing 30$ mm - 1625 nm	max. 0.3	dB
Bending sensitivity - 1 turn around $\varnothing 20$ mm - 1550 nm	max. 0.75	dB
Bending sensitivity - 1 turn around $\varnothing 20$ mm - 1625 nm	max. 1.5	dB
Proof test level	min. 0.70	GPa
Fibre curl	min. 4	m
Cable cut-off wavelength	max. 1260	nm
Zero-dispersion wavelength	1300 – 1324	nm
Zero-dispersion slope	max. 0.090	ps/nm ² ·km
Chromatic dispersion: 1285 nm – 1330 nm	max. 3.2	ps/nm·km
Chromatic dispersion: 1550 nm	max. 17	ps/nm·km
Chromatic dispersion: 1625 nm	max. 21	ps/nm·km
Polarisation mode dispersion: max. individual fibre	max. 0.1	ps/nm·km
PMD ₀	max. 0.06	ps/ $\sqrt{\text{km}}$
Max. attenuation at 1383 nm (α_{1383}) [note a]	< max. α_{1310}	-
Effective group core refractive index: 1310 nm	1.4671	-
Effective group core refractive index: 1550 nm	1.4675	-
Effective group core refractive index: 1625 nm	1.4680	-

note a: after hydrogen ageing



TECHNICAL PRODUCT INFORMATION

Catenary calculations

LTC ADSS-150

	Wind velocity			Ice thickness		Additional load		Temperature	
	m/s	km/h	mph	mm	inch	kg/m	lbs/ft	°C	°F
NESC light	26.5	95	59	0	0	0.073	0.05	-1	30
NESC medium	17.7	64	40	6.5	0.25	0.296	0.2	-10	15
NESC heavy	17.7	64	40	12.5	0.5	0.449	0.3	-20	0

	Fibre count	Tubes & fibers n x m	max. span (m)	Installation			Operation		
				nom. sag (%)	nom. tension (N)	nom. CS (%)	vect. sag (%)	max. tension (N)	max. CS (%)
NESC light	12	6 x 2	321	1.0	3743	0.51	3.5	6536	0.80
	24	6 x 4	325	1.0	3829	0.49	3.4	3738	0.78
	24	2 x 12	318	1.0	4332	0.45	3.2	7523	0.71
	24	3 x 8	311	1.0	4084	0.52	3.4	6925	0.80
	36	6 x 6	325	1.0	4109	0.41	3.2	7394	0.66
	48	6 x 8	313	1.0	4226	0.52	3.4	7056	0.80
	48	4 x 12	311	1.0	4275	0.46	3.2	7338	0.71
	72	6 x 12	311	1.0	4390	0.47	3.2	7422	0.71
	96	8 x 12	287	1.0	5037	0.51	3.1	7951	0.74
144	6 x 24	274	1.0	4910	0.55	3.1	7611	0.78	

NESC medium	12	6 x 2	232	1.0	2705	0.39	4.0	6640	0.80
	24	6 x 4	235	1.0	2769	0.38	4.0	6840	0.78
	24	2 x 12	237	1.0	3229	0.36	3.7	7932	0.71
	24	3 x 8	232	1.0	3047	0.41	3.9	7029	0.80
	36	6 x 6	235	1.0	2971	0.33	3.7	7489	0.66
	48	6 x 8	234	1.0	3159	0.42	3.9	7163	0.80
	48	4 x 12	231	1.0	3176	0.37	3.7	7434	0.71
	72	6 x 12	232	1.0	3275	0.37	3.7	7532	0.71
	96	8 x 12	227	1.0	3984	0.42	3.6	8113	0.74
	144	6 x 24	219	1.0	3924	0.46	3.6	7779	0.78


NESC heavy	12	6 x 2	150	1.0	1749	0.29	4.5	6755	0.80
	24	6 x 4	150	1.0	1767	0.28	4.4	6897	0.77
	24	2 x 12	150	1.0	2044	0.26	4.1	7581	0.70
	24	3 x 8	150	1.0	1970	0.30	4.4	7079	0.79
	36	6 x 6	150	1.0	1896	0.24	4.1	7552	0.66
	48	6 x 8	150	1.0	2025	0.30	4.4	7157	0.78
	48	4 x 12	150	1.0	2062	0.27	4.2	7516	0.71
	72	6 x 12	150	1.0	2117	0.27	4.1	7576	0.71
	96	8 x 12	150	1.0	2703	0.32	4.1	8269	0.74
	144	6 x 24	150	1.0	2688	0.34	4.2	7948	0.78

TECHNICAL PRODUCT INFORMATION

Cable construction and colour code

LTC ADSS -30 / -80 / -150

All-dielectric self-supporting cable
FO cable with stranded loose tubes

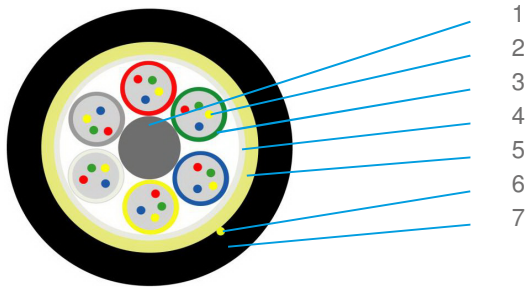

Description

1	Central element (FRP)
2	Optical fibres
3	Loose tube with optical fibres
4	Binders & waterblocking tape
5	Waterblocking aramid
6	Ripcord
7	Outer sheath

Standard colours

Fibres		Tubes	
Group 1	Group 2	Layer 1	
1 Red	13 Red +t	1 Red	
2 Green	14 Green +t	2 Green	
3 Blue	15 Blue +t	3 Blue	
4 Yellow	16 Yellow +t	4 Yellow	
5 White	17 White +t	5 White	
6 Grey	18 Grey +t	6 Grey	
7 Brown	19 Brown +t	7 Brown	
8 Violet	20 Violet +t	8 Violet	
9 Turquoise	21 Turquoise +t	9 Turquoise	
10 Black	22 Natural +t	10 Black	
11 Orange	23 Orange +t	11 Orange	
12 Pink	24 Pink +t	12 Pink	

note +t: indicates a black tracer