


Features

- S/FTP Cat.6 4x2xAWG 27 LSHZ
- Outer diameter 6,2mm
- Flame retardant acc. to IEC-60332-1
- Length imprinted on strain relief
- Contacts gold-plated

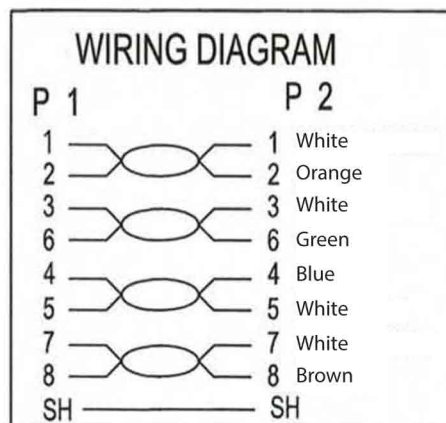


Art.No.	K551x.x	File	K551x.x_NEU.indd		
Description	Cat.6 Patch Cable S/FTP 250MHz				
Created	Date	Last revision	Date	Proved	Date
FD	22.10.2015	AS	14.02.2017	BT	14.02.2017

DATASHEET

Cat.6 Patch Cable S/FTP 250MHz

Art.-No. K551x.x

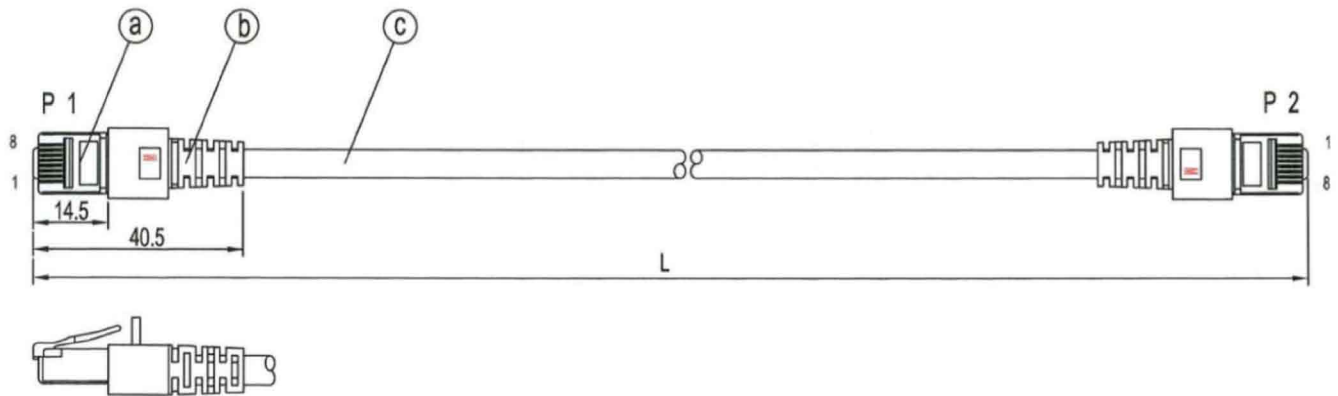

Specification

No.	Type	Description
a	Connector	RJ45 plug shielded and gold plated contacts
b	Boot	PVC 75A / Length imprinted
c	Cable	S/FTP Cat.6 4x2xAWG27 LSZH Outer diameter 6.2mm, Bending radius : 5 x outer diameter Jacket: Flame retardant acc. to IEC 60332-1 Printing: Cat.6 S/FTP 4x2xAWG27/7 PIMF ISO/IEC 11801 & EN50173-1 TIA/EIA 568.2-1 Halogen Free ***Gigabit***
general temperature range	0° up to + 60°C	
withstand voltage	500V DC	

Order Data

Cat.6 Patch cable S/FTP 250MHz					
K5510.x	gray	K5511.x	yellow	K5512.x	red
K5513.x	blue	K5514.x	green	K5515.x	black
K5516.x	orange	K5517.x	brown	K5518.x	white
K5519.x	magenta				

Available lengths in meters:

0,15 - 0,25 - 0,5 - 1,0 - 1,5 - 2,0 - 3,0 - 5,0 - 7,5 - 10,0 - 15,0 - 20,0 - 25,0 - 30,0



Art.No.	K551x.x	File	K551x.x_NEU.indd		
Description	Cat.6 Patch Cable S/FTP 250MHz				
Created	Date	Last revision	Date	Proved	Date
FD	22.10.2015	AS	14.02.2017	BT	14.02.2017