



## Presentation

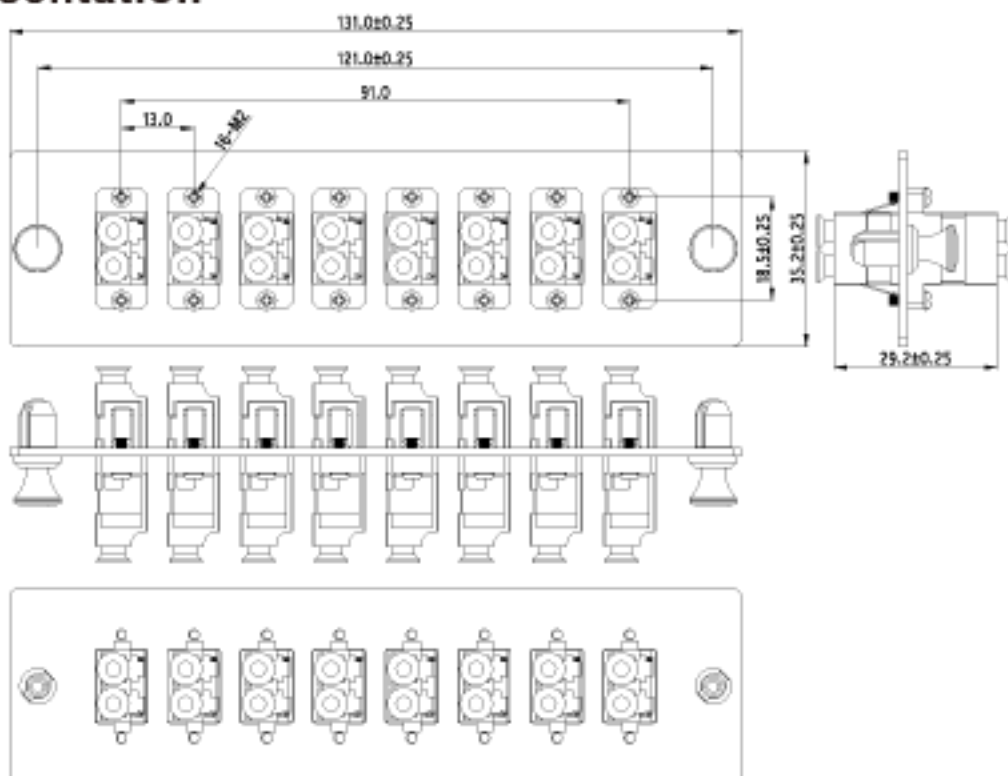

## Photo

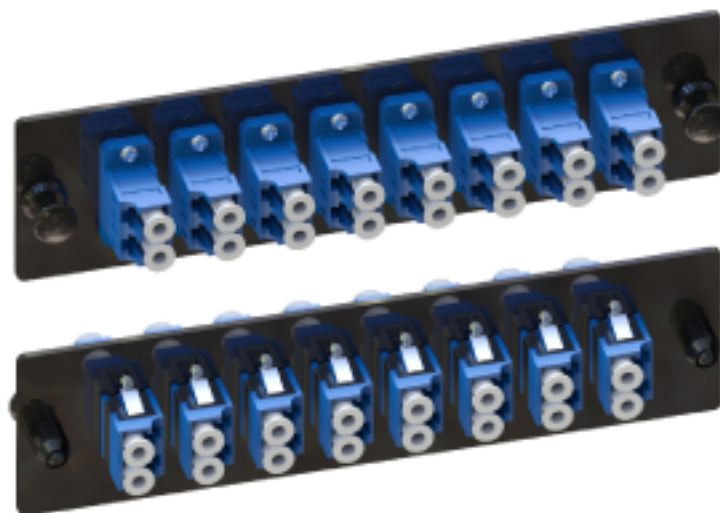

### Application:

CATV System  
Telecommunication  
Optical Networks  
Testing / Measurement Instruments Fiber To the Home

### Features:

High size precision  
Good repeatability  
Good changeability  
Good temperature stabilization  
High wearability

### Mechanical

Mating cycles : 1000 cycles minimum  
Operating temperature : -10~60°C  
Operating humidity : 10%~85%RH  
Storage temperature : -40°C TO 70°C

### Physicals:

Housing material : High quality engineering plastic  
Panel Frame: SPCC powder coating in black color

### Specification :

- 1、 Insertion loss(IL)  $\leq$  0.2 dB;
- 2、 Insertion and Extraction Force : 2~6N;
- 3、 Interchangeable  $\leq$  0.2dB;
- 4、 Repeatable  $\leq$  0.2dB
- 5、 Reusable(Times) > 500 times
- 6、 Storage temperature: -40°C~+85°C
- 7、 Operating humidity :  $\leq$ 85% (temperature 85°C $\pm$ 3°C)

Art.nr. 59500038