


KDVKK3

Hinged cover square, universal

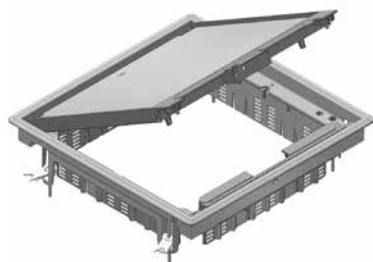

Build-in frame + hinged cover + cable outlet unit

Color	grey RAL 7011 / Black RAL 9011
Max. load	1500 N (small surface area)
Max. load	2000 N (large surface area)
Active condition	IP 20
Non-active condition	IP 30
Depth of floor covering	Min. 5 mm - Max. 12 mm
Thickness steel plate	3 mm
Standard finish	Polypropylene

HD	Reference	mm	mm	mm	mm	kg/piece		Stock	Unit
-	KDVKK3.5-7011	-	267		267	2.200	6	✓	piece
-	KDVKK3.5-9011	-	267		267	2.200	6	✓	piece

Tested to EN 50085-2-2.

Hinged cover for 3 compartments.

Standard depth of floor covering is 5 mm and can be reduced by fitting packers OHEV3.2 and/or OHEV3.5.

Can be fixed through included universal clamps in screed floor.

Hinged cover is provided with 2 cable outlets with integrated push lever and 2 cable organisers. Hinged cover must not be earthed.

For use in dry floors only.