

DATABLAD - Prod.nr. 90006105

10" Patch panel Cat 6, 12 port x RJ45 Uskjermet


22. jun 2021

Performance:

Meets C6 EIA/TIA 5688 Standard.

Materials:

Front Plate	: Fireproof ABS UL-94V0
Panel	: Metal (SPCC)
Jack	: 8P8C 50 micro inches gold plated
PCB	: FR-4 / UL-94V0
IDC Body	: Fireproof ABS UL-94V0
IDC Pin	: Bronze & Tinned

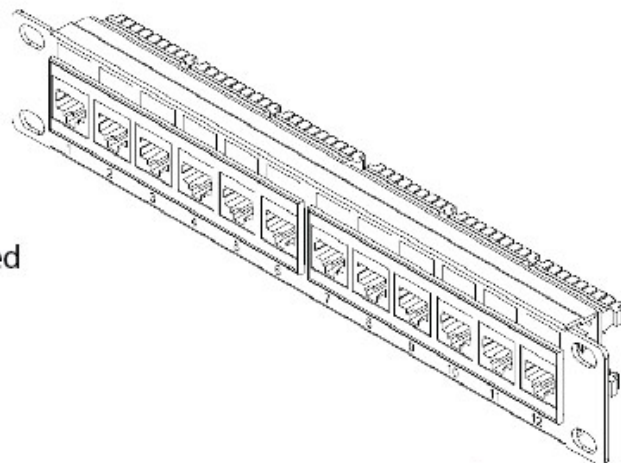

DC Description : For 22-26 AWG.

For 110 or Krone punch-down Teol



Electrical Specifications:

Insulation Resistance: 500M ohms (min.)

Contact Resistance: 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance : 0.1 ohms (max.)

Withstanding Voltage: 1000 VAC RMS@ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)

Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature: -40 °C ~+70 °C